

LED LINEAR LIGHT




① Feature


- ⌘ Can be seamless connected, five-sided lighting
- ⌘ L-shaped connection, T-shaped connection, and cross-type connection are available
- ⌘ As high as 100lm/w
- ⌘ No dark areas at splicing position
- ⌘ Flicker free
- ⌘ Optional dimming: 0-10V, DALI ,CCT adjustable , controlled by Alexa and google home speaker
- ⌘ Optional length: 4FT, 5FT, 6FT, 7FT, 8FT, custom lengths
- ⌘ 3 year warranty



① Application

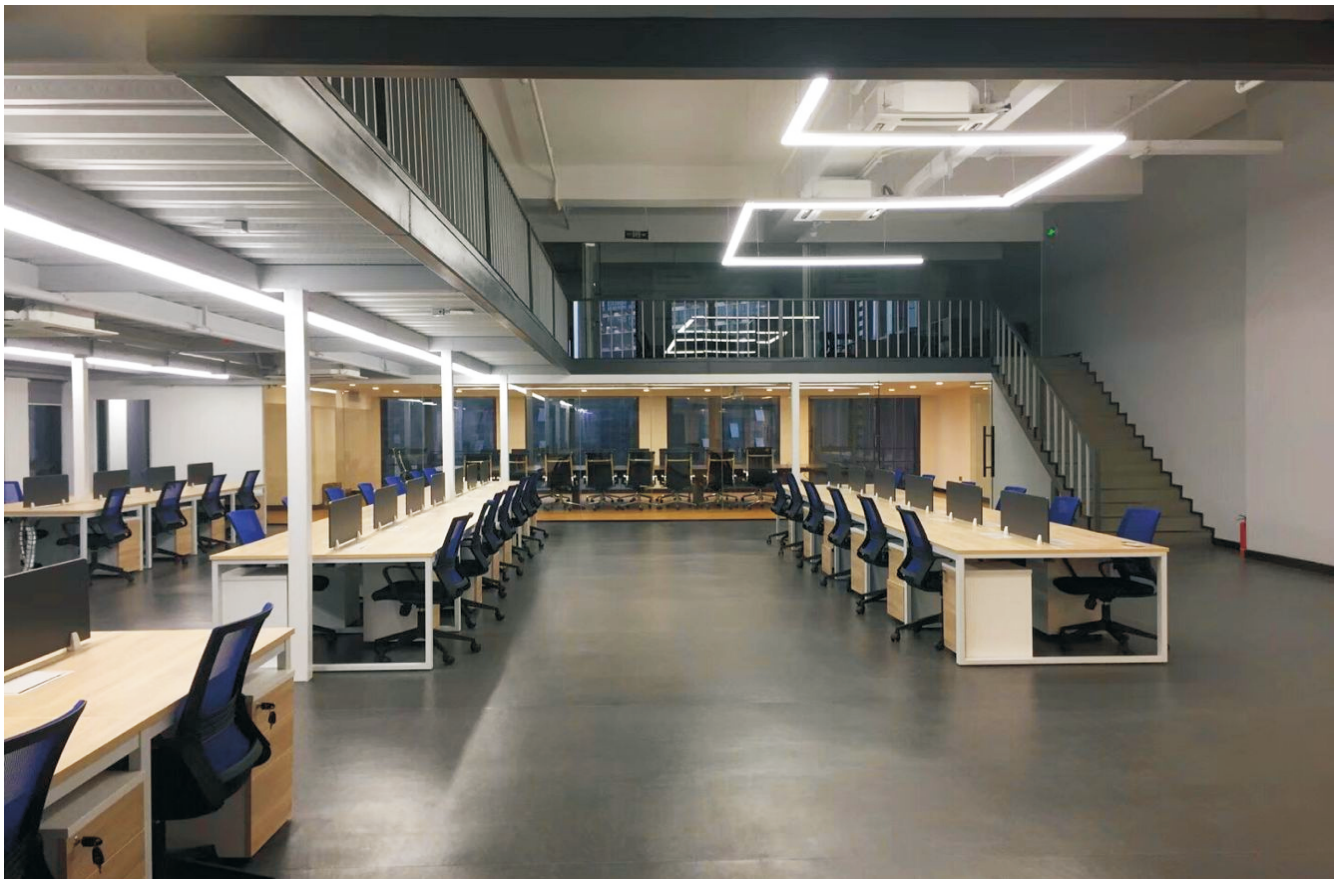


① Section size

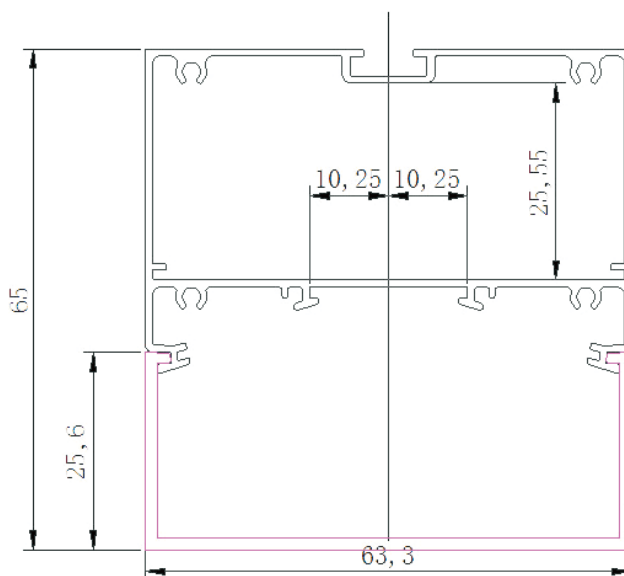

Colour






Installation

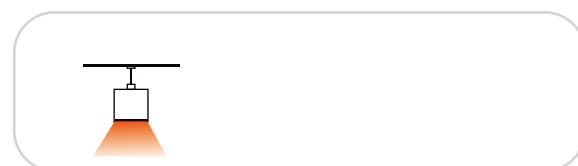

① Specification

Model No.	C&C-XX-1260W1A	C&C-XX-1580W1A	C&C-XX-18100W1A	C&C-XX-24120W1A
Size	1200*65*63mm	1500*65*63mm	1800*65*63mm	2400*65*63mm
Rated Power	60W	80W	100W	120W
Input Voltage	AC-100-350v 50~60Hz	AC-100-350v 50~60Hz	AC-100-350v 50~60Hz	AC-100-350v 50~60Hz
LED Quantity	192pcs SMD 2835	240pcs SMD 2835	288pcs SMD 2835	384pcs SMD 2835
Color Temperature	2800K-3300K 4000K-4500K 5500K-6500K	2800K-3300K 4000K-4500K 5500K-6500K	2800K-3300K 4000K-4500K 5500K-6500K	2800K-3300K 4000K-4500K 5500K-6500K
Luminous flux	6600-7800LM	8800-10400LM	11000-13000LM	13200-15600LM
CRI	>80	>80	>80	>80
Materials	Aluminum & PC Cover	Aluminum & PC Cover	Aluminum & PC Cover	Aluminum & PC Cover
Beam Angle	120°	120°	120°	120°
IP Grade	IP20	IP20	IP20	IP20
Package	21KG/10PCS	26KG/10PCS	16KG/5PCS	21kg/5pcs
Carton size	1250*400*210mm	1550*400*210mm	1850*400*100mm	2450*400*100mm
Net weight	1.7kg	2.1kg	2.5kg	3.4kg
warranty	3 years	3 years	3 years	3 years

① Corner accessories

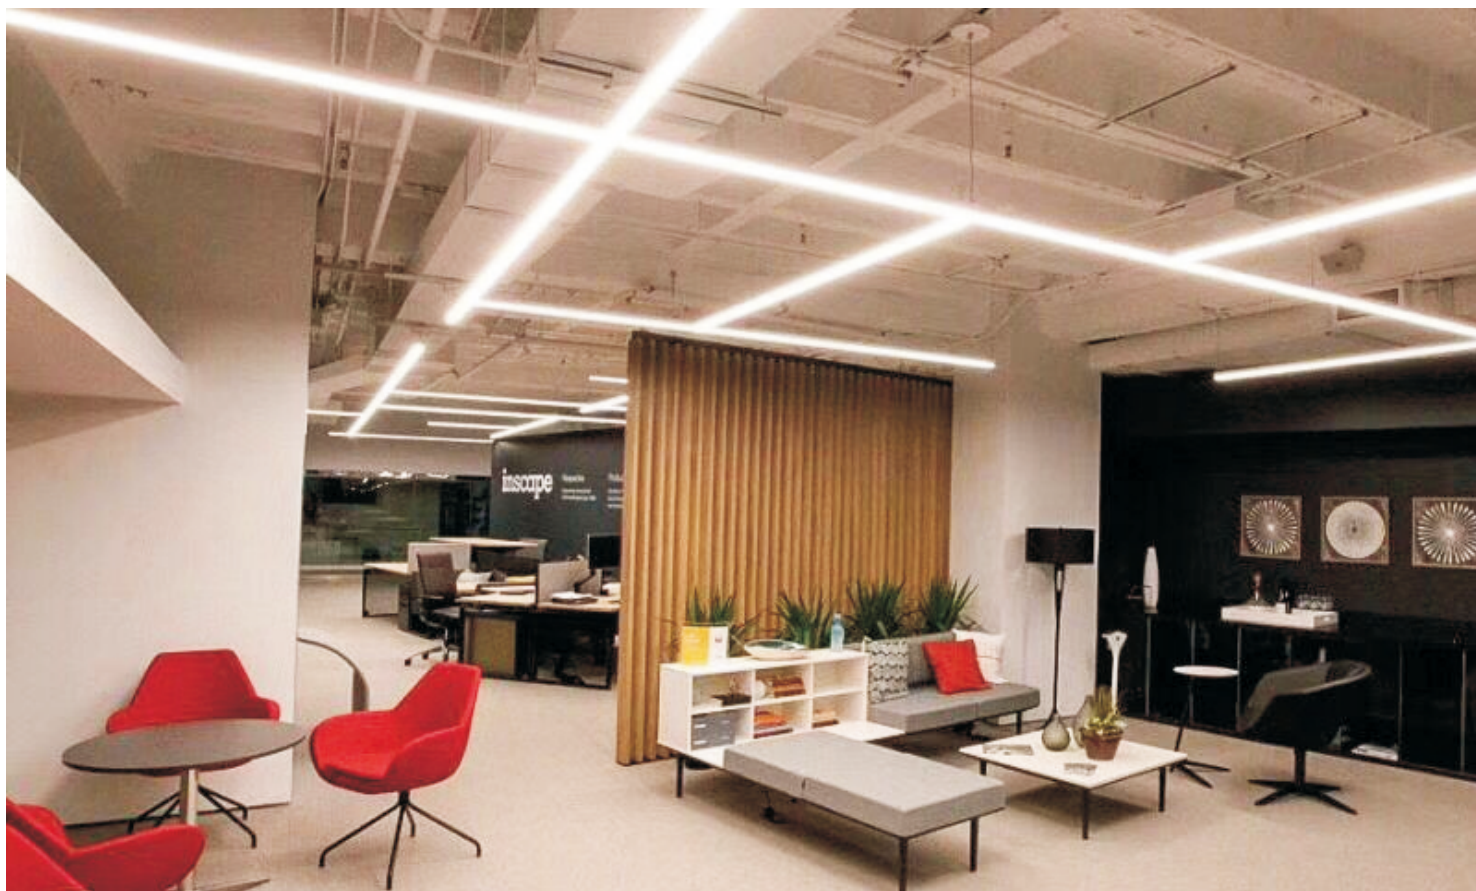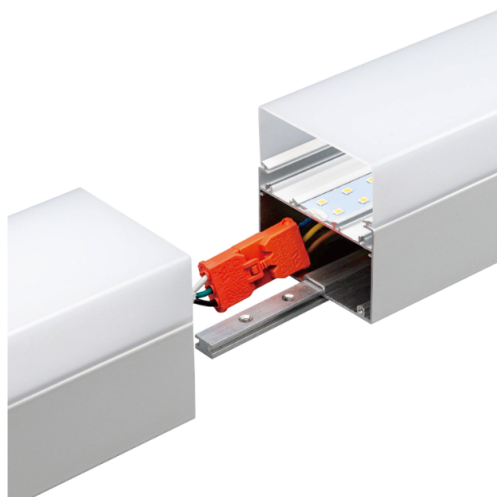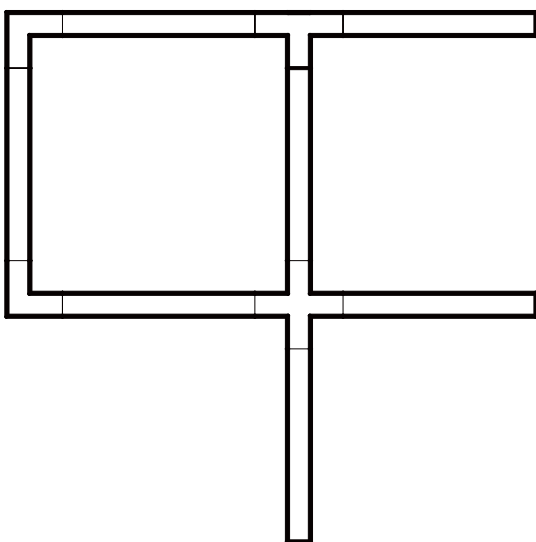

🕒 Installation

Pendant Installation

