



LED RECESSED CEILING LIGHT


850 LUMENS

4" / 9W / 120V


5CCT

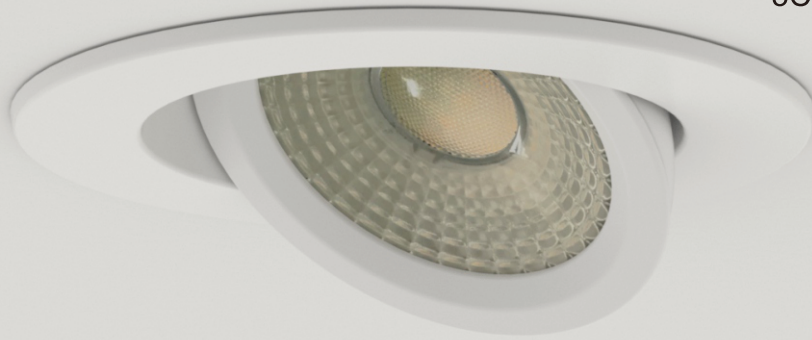



Overview

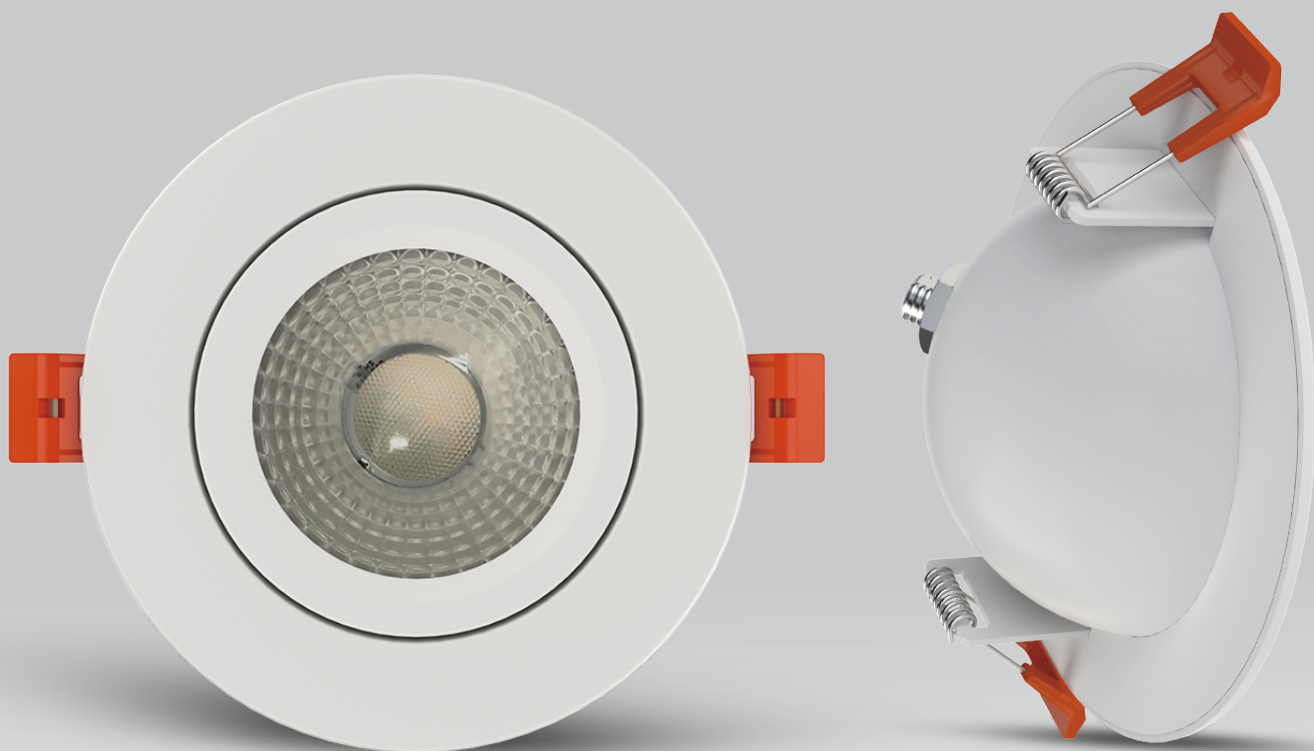

Structures

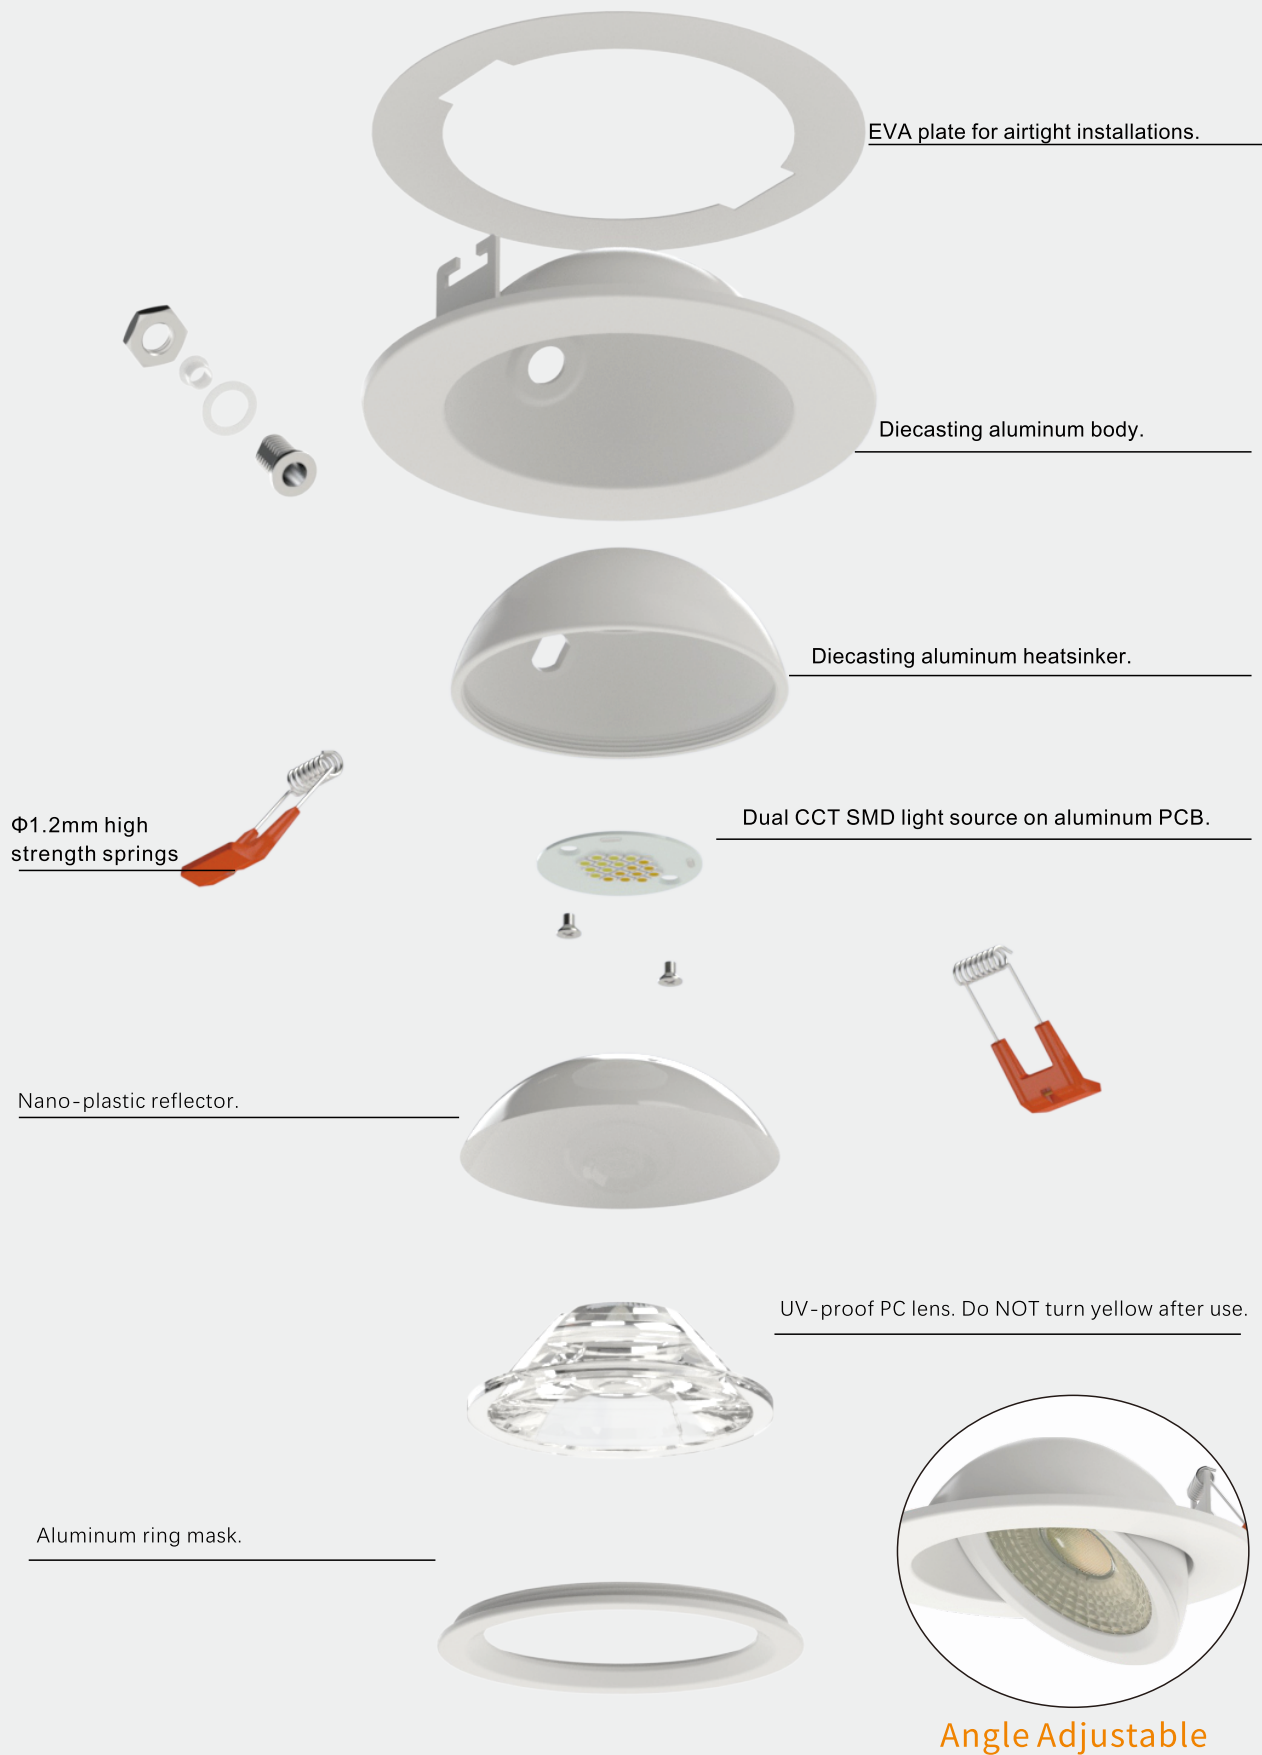


Thermal Management

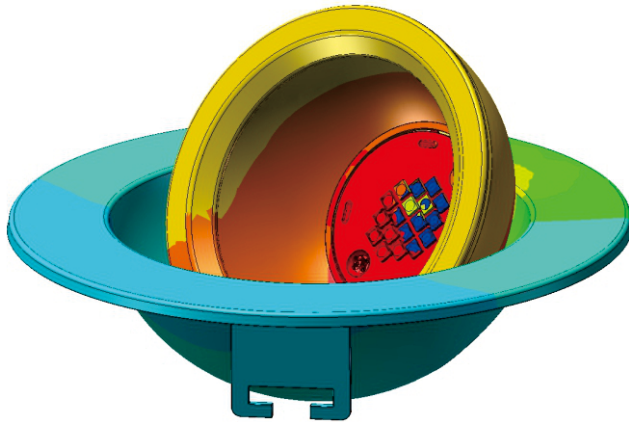


Unit: °C

With latest FEA technology, thermal performance is well managed during design process. So that our clients are getting the products in best cost-efficiency.



Thermal Air Convection

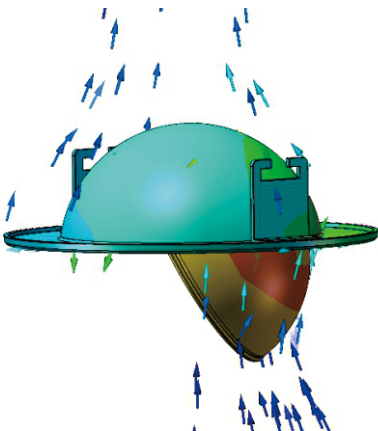




Thermal Air to Environment

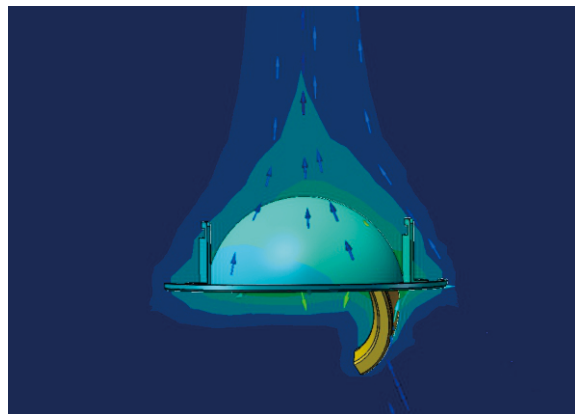

Thermal Conductivity

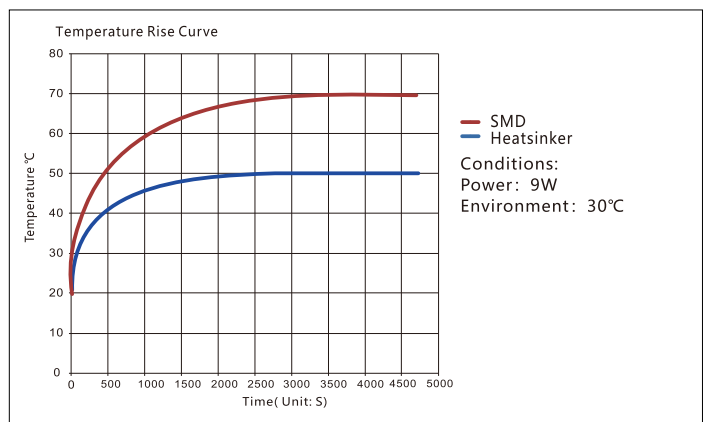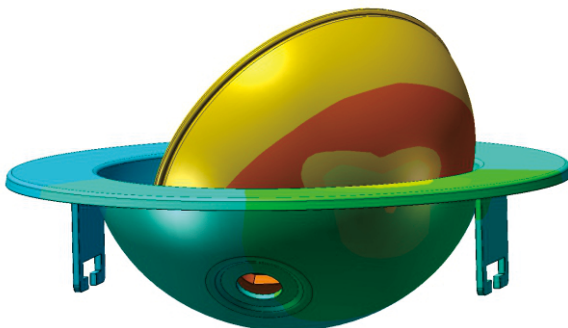


Diagrams

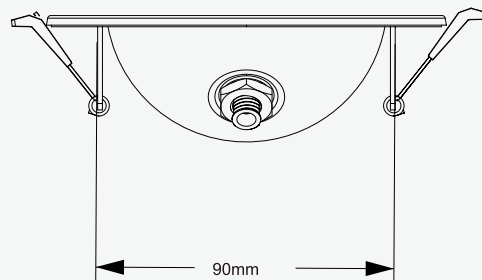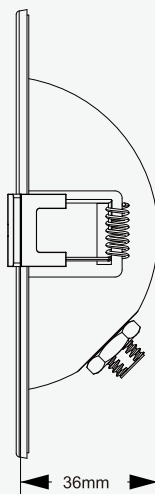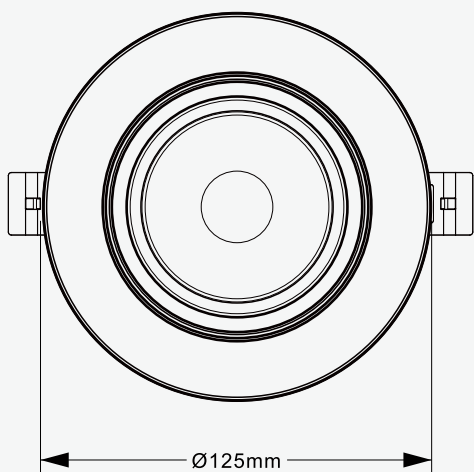


Rays



Lighting Distributions

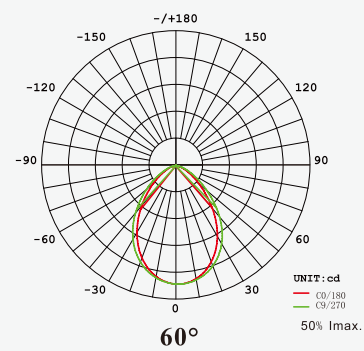

Applications

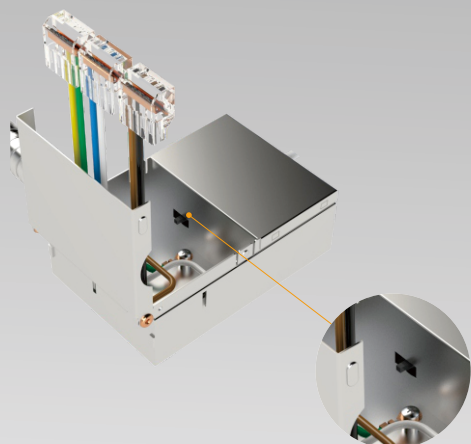

+ DIM -
DIMMABLE
5~100%

DIP Switch CCT Adjustable

This led downlight come with the range of dimming 5~100%, that work with most of the dimmers in the market, allowing you to enjoy the 5~100% light range, based on your preference.

2700K 3000K 3500K 4000K 5000K



DAMP LOCATION USE



Features:

Ideal for new construction, remodelling and insulated ceilings applications. No recessed housing required.



Low-profile fixture, without big driver box to fit in the tightest of spaces.
Two spring clips can be used to attach the light to any ceiling material.

Parameters

| Commodity | Power | Input Voltage | Brightness | Efficacy | CCT | Beam Angle |
|----------------------------|-------|---------------|------------|----------|-------------------------------|------------|
| Recessed LED Ceiling Light | 9W | 120VAc 60Hz | 850LM | 100lm/W | 2700K/3000K/3500K/4000K/5000K | 60° |

Installation Instructions

Cautions for Wiring:

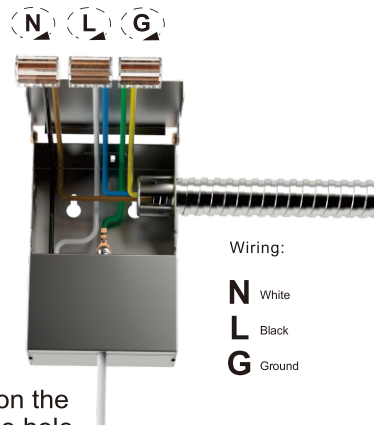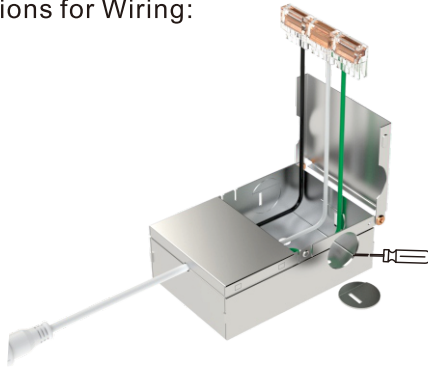

Wiring:


N White
L Black
G Ground

Remove one of the knockouts on the side plate. Put wires through the hole.




1.

Use tool to cut out the appropriate holes in the ceiling.

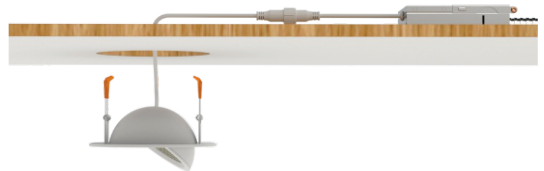


2.

Wiring correctly.

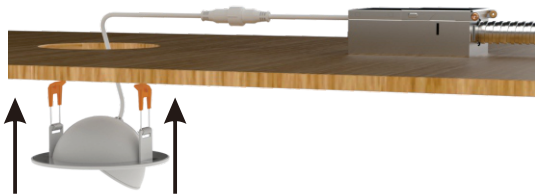

3.

Holding the clips, and push the fixture into installation hole.

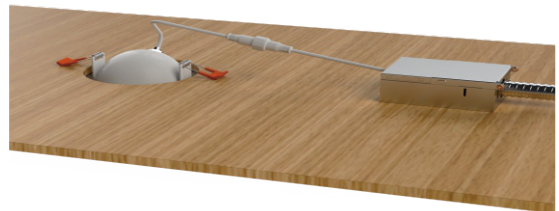

4.

Release spring clips and push into place.



5.

Adjust the lighting angles and installation finished.